


Lumatech - LED Downlight

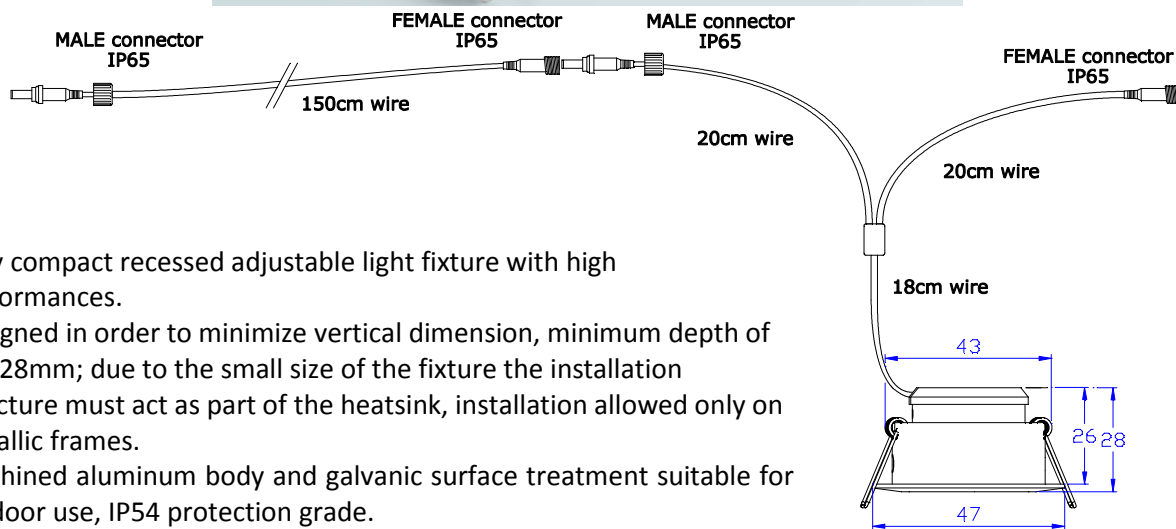

Very compact recessed adjustable light fixture with high performances.

Designed in order to minimize vertical dimension, minimum depth of just 28mm; due to the small size of the fixture the installation structure must act as part of the heatsink, installation allowed only on metallic frames.


Machined aluminum body and galvanic surface treatment suitable for outdoor use, IP54 protection grade.

High efficiency light source delivering more than 380lm from a very small emitting area, optical grade PMMA secondary optics. Supplied with one extension cord 150cm and one cables 20cm + 20cm, each terminated with IP65 male-female connectors for fast parallel installation.

Dimmable when controlled with TVSTRD receiver.

NOTES: Product must be installed on a metallic surface, take care thermal exchange exists between the fixture and the installation surface.

Available Colors:	Anodized Aluminum
Light Source:	CREE XML-BEZ, Generation II
Light Output:	380lm min.
CCT:	3000K, 4000K(on request)
Beam Angle:	36°
Power Supply:	24Vdc
Power Consumption:	4.2W
Safety Class:	class III
IP Grade:	IP54
Cut Out:	43mm

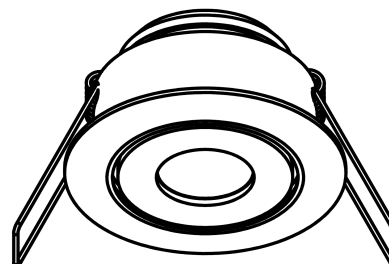

⁰ In the view of a constant development of their products, the manufacturer reserves the right for changing technical data and features without prior notice.